

## Declaration of Performance no. 5/SZ/13

1.	<b>Product Type:</b> Unique identification code of the product type:	ECO-DRIVE S
2.	<b>Type batch or serial number or any other element allowing identification of the construction product as required under Article 11(4):</b>	The batch number is the production date shown on the box as dd/mm/yy
3.	<b>Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:</b>	Screwed-in plastic anchor for fixing of external thermal insulation composite systems with rendering in concrete and masonry
4.	<b>Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11(5):</b>	KLIMAS WKREŃ-MET Sp. z o.o. ul. Wincentego Witosa 135/137 Kuźnica Kiedrzyńska PL 42-233 Mykanów
5.	<b>Contact Address:</b> Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2):	not relevant
6.	<b>AVCP:</b> System or systems of assessment and verification of constancy of performance (AVCP) of the construction product as set out in CPR, Annex V:	System 2+
7.	<b>Notified body (hEN):</b> In case of the declaration of performance (DoP) concerning a construction product covered by a harmonised standard:	not relevant
8.	<b>Notified body (ETA):</b> In case of the declaration of performance concerning a construction product for which a European Technical Assessment (ETA) has been issued:	The notified body DIBt issued the European Technical Approval ETA-13/0107 according ETAG 014. Notified factory production control certification body No. 1488, ITB performed the initial inspection of the manufacturing plant and of factory production control and the continuous surveillance, assessment and evaluation of factory production control 2+ and issued the certificate of conformity of the factory production control (FPC) WE 1488-CPD-0256/Z

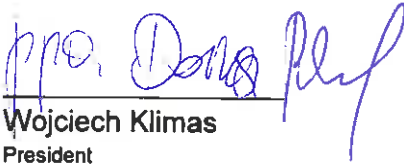
### 9. Declared performance

Essential characteristics	concrete C12/15	concrete C16/20	solid clay brick	sand-lime solid brick	perforated sand-lime solid brick	vertically perforated bricks	lightweight concrete LAC	autoclaved aerated concrete AAC2	autoclaved aerated concrete AAC7	Harmonised technical specification	
Characteristic resistance [kN]	1,2	1,5	1,5	1,5	1,5	1,5	0,9	0,6	1,2	ETA-13/0107 from 16.05.2013 according to ETAG 014	
Point of thermal transmittance [W/K]	0,0017										
Plate stiffness [kN/mm]	0,6										

## 10. Declaration

The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance (DoP) is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

  
Wojciech Klimas  
President

Kuźnica Kiedrzyńska, 03.06. 2013